



CARTRIDGE FILTER HOUSING

N100-2-15-T-CP



Flow Pro Cartridge Filter Housing is designed to remove contaminants from variety of application fluids. The heavy duty quality construction provides years or reliable service and protection of down stream equipment and processes.

Features and Benefits:

- Carbon steel construction
- Swing bolt closure assembly permits easy cleaning and cartridge change out
- Housing construction designed for 150 psi maximum pressure
- Standard Buna-N o-ring seal with optional Viton or PTFE elastomer
- 1-1/2" NPT inlet and outlet connections, 1/2" drain
- Vent and pressure gage

Applications:

- Water Soluble Coolant
- Grinding Oils
- Cutting Oils
- Hydraulic Oils
- Quench Oils
- Solvents
- Dielectric Oils
- Transformer Oils

Model

N100-1 Holds (1) 18" filter cartridge

N100-2 Holds (2) 18" or (1) 36" cartridge(s)

The Filter Housing will accommodate a variety of filters including:

- Particle filtration; 100,50,30,25,20,10,5,1,0.5 Micron(μm)
- Oil Absorbent
- Fullers Earth
- Water Absorbent

Portable and Stationary Systems

N100	-2	-15	-T	-CP	V
Series	No. Off	Pump Flow	T-3 phase	CP-Portable	Blank-Standard
	Cartridges	6,9,15 GPM	S-1 phase	CS-Stationary	V-Viton fitted



N100-2-15-T-CS

Phone: (815) 836-1900 Fax: (815) 836-1901

618 Anderson Drive, Suite A, Romeoville, IL 60446

WWW.FLOWPROINC.COM

COPYRIGHT© FLOWPRO PRODUCTS, INC. 2014 ALL RIGHTS RESERVED

FLOW PRO
PRODUCTS, INC.

Cartridge Filter Housings




Carbon Steel
Model N100-2



N100-4



Cartridge Filter Housing

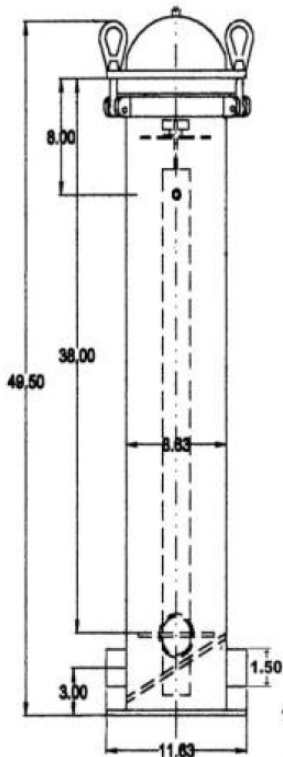

N100-6-25-TCS

Phone: (815) 836-1900 Fax: (815) 836-1901

618 Anderson Drive, Suite A, Romeoville, IL 60446

WWW.FLOWPROINC.COM

FLOW PRO
PRODUCTS, INC.